

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :							
Product line : W20 Three-Phase			Product code : 17700806				
Frame	: 90S/L		Locked rotor time	: 18s (cold) 10s (hot)			
Output	: 1.5 kW (2 HP)		Temperature rise	: 80 K			
Poles	: 4		Duty cycle	: S1			
Frequency	: 50 Hz		Ambient temperature	: -20°C to +40°C			
Rated voltage	: 230/400 V		Altitude	: 1000 m.a.s.l.			
Rated current	: 5.52/3.17 A		Protection degree	: IP55			
L. R. Amperes	: 40.8/23.5 A		Cooling method	: IC411 - TEFC			
LRC	: 7.4		Mounting	: B3T			
No load current	: 3.16/1.81 A		Rotation ¹	: Both (CW and CCW)			
Rated speed	: 1450 rpm		Noise level ²	: 49.0 dB(A)			
Slip	: 3.33 %		Starting method	: Direct On Line			
Rated torque	: 9.88 Nm		Approx. weight ³	: 19.5 kg			
Locked rotor torque	: 290 %						
Breakdown torque	: 360 %						
Insulation class	: F						
Service factor	: 1.00						
Moment of inertia (J)	: 0.0066 kgm ²						
Design	: N						
Output	50%	75%	100%	Foundation loads			
Efficiency (%)	83.1	85.0	85.3	Max. traction	: 921 N		
Power Factor	0.59	0.72	0.80	Max. compression	: 1112 N		
Losses at normative operating points (speed;torque), in percentage of rated output power							
P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)	
16.9	15.4	14.8	8.6	6.5	4.8	3.6	
		<u>Drive end</u>		<u>Non drive end</u>			
Bearing type	:	6205 ZZ		6204 ZZ			
Sealing	:	V'Ring		V'Ring			
Lubrication interval	:	-		-			
Lubricant amount	:	-		-			
Lubricant type	:	Mobil Polyrex EM					
Notes							
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.				These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in IEC 60034-1.			
Rev.	Changes Summary			Performed	Checked	Date	
Performed by							
Checked by					Page	Revision	
Date	02/12/2025				1 / 6		

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Thermal protection

ID	Application	Type	Quantity	Sensing Temperature
1	Winding	Thermistor - 2 wires	1 x Phase	155 °C

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	02/12/2025		2 / 6	

TORQUE AND CURRENT VS SPEED CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W20 Three-Phase

Product code : 17700806

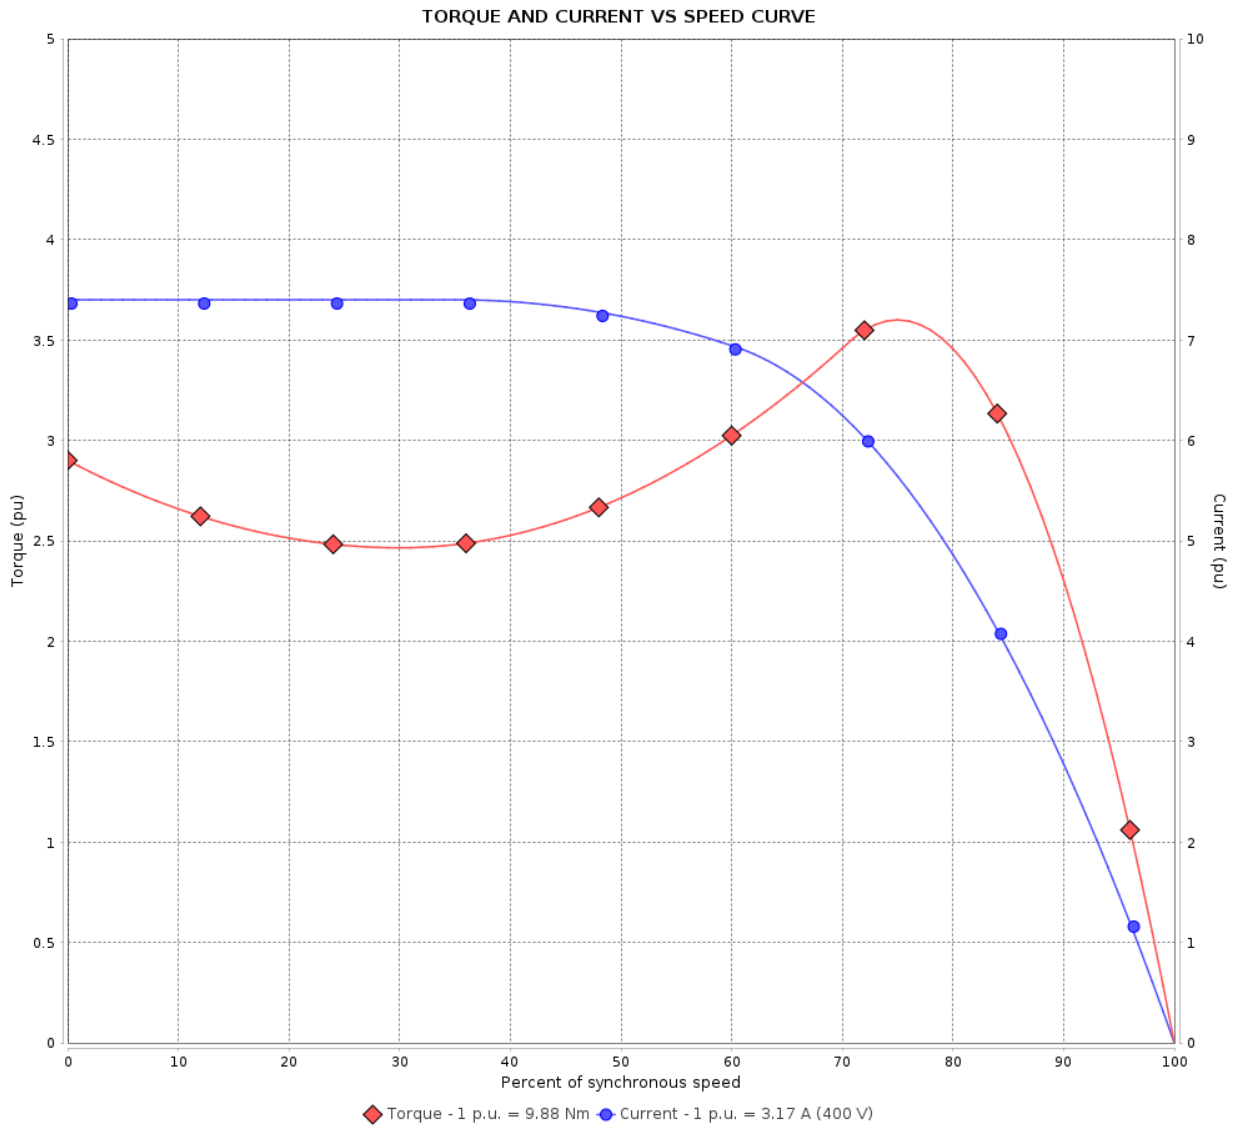

Performance : 230/400 V 50 Hz 4P

Rated current	: 5.52/3.17 A	Moment of inertia (J)	: 0.0066 kgm ²
LRC	: 7.4	Duty cycle	: S1
Rated torque	: 9.88 Nm	Insulation class	: F
Locked rotor torque	: 290 %	Service factor	: 1.00
Breakdown torque	: 360 %	Temperature rise	: 80 K
Rated speed	: 1450 rpm	Design	: N

Locked rotor time : 18s (cold) 10s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 3 / 6	Revision
Checked by				
Date	02/12/2025			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W20 Three-Phase

Product code : 17700806

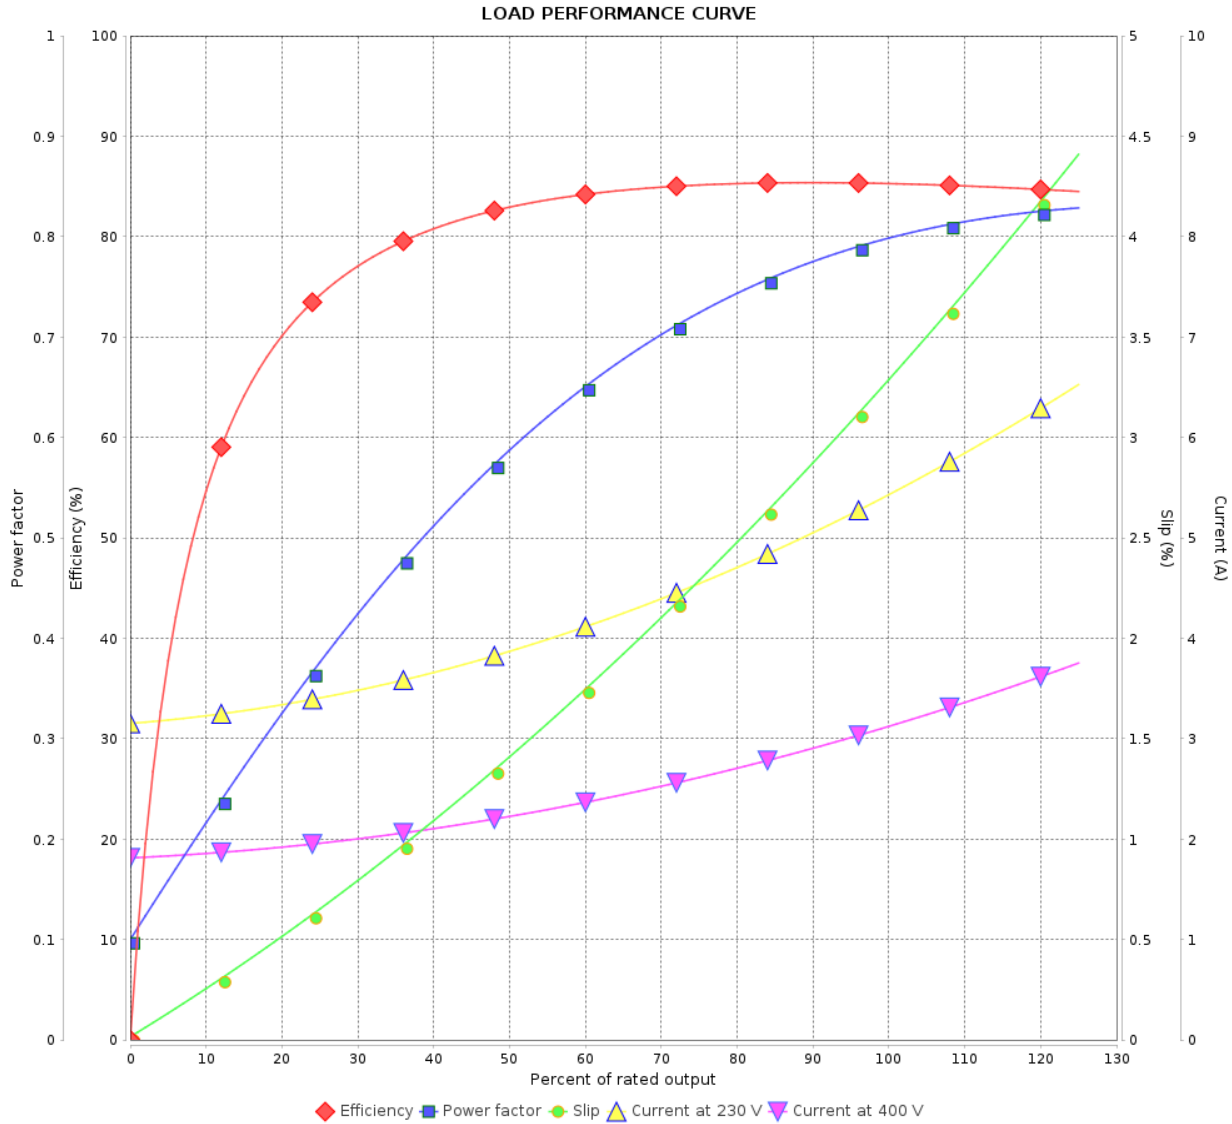

Performance : 230/400 V 50 Hz 4P

Rated current : 5.52/3.17 A
 LRC : 7.4
 Rated torque : 9.88 Nm
 Locked rotor torque : 290 %
 Breakdown torque : 360 %
 Rated speed : 1450 rpm

Moment of inertia (J) : 0.0066 kgm²
 Duty cycle : S1
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 80 K
 Design : N

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

THERMAL LIMIT CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W20 Three-Phase

Product code : 17700806

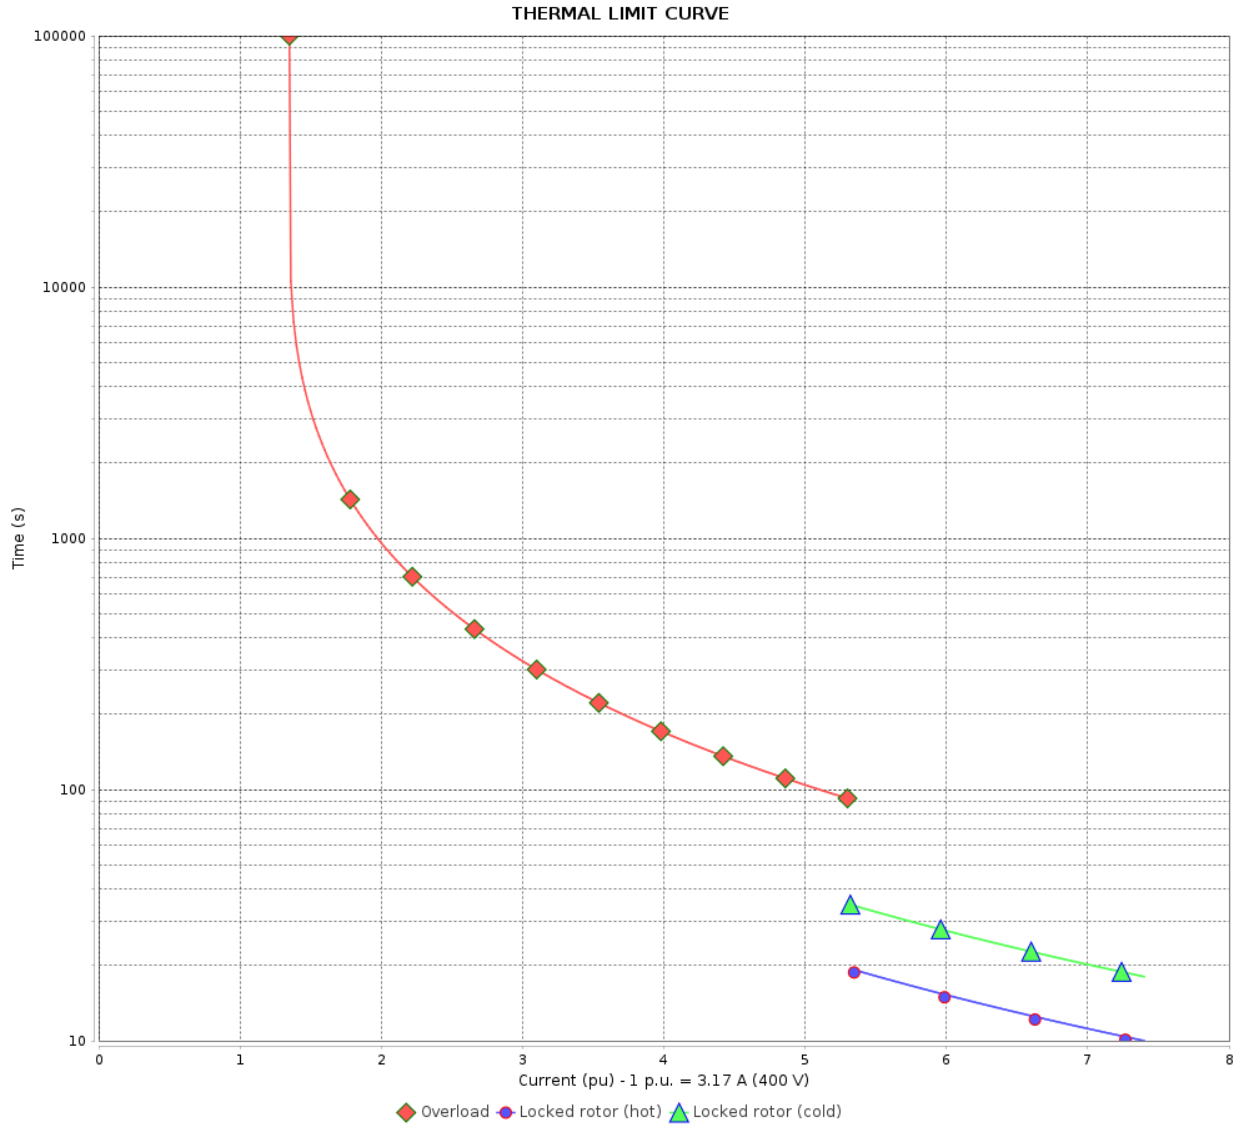

Performance : 230/400 V 50 Hz 4P

Rated current : 5.52/3.17 A
 LRC : 7.4
 Rated torque : 9.88 Nm
 Locked rotor torque : 290 %
 Breakdown torque : 360 %
 Rated speed : 1450 rpm

Moment of inertia (J) : 0.0066 kgm²
 Duty cycle : S1
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 80 K
 Design : N

Heating constant
 Cooling constant

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 5 / 6	Revision
Checked by				
Date	02/12/2025			

VFD OPERATION CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W20 Three-Phase

Product code : 17700806

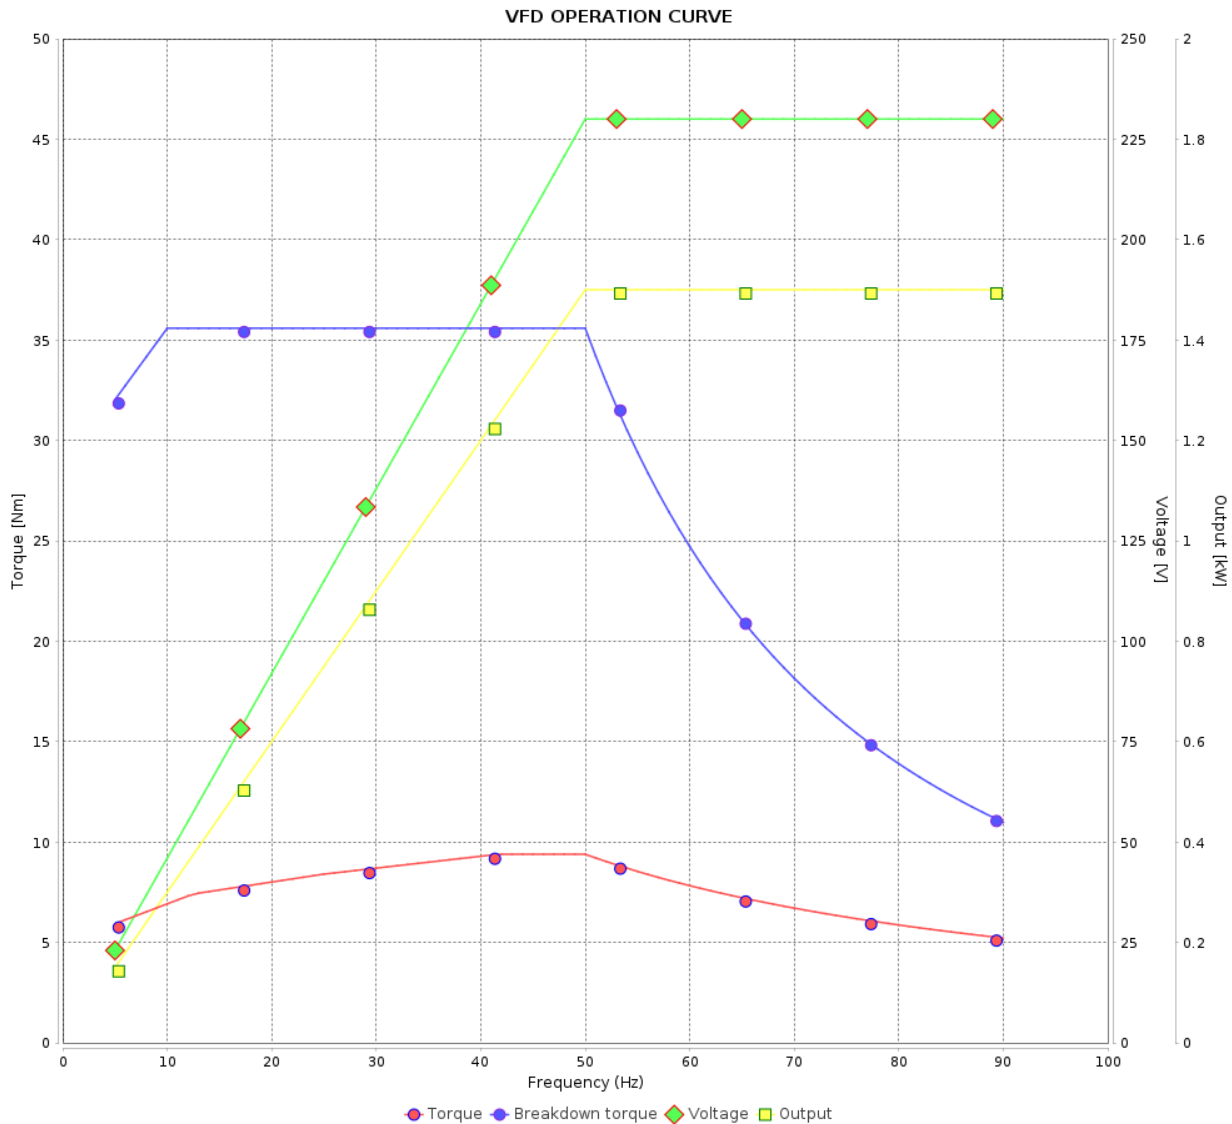

Performance : 230/400 V 50 Hz 4P

Rated current : 5.52/3.17 A
 LRC : 7.4
 Rated torque : 9.88 Nm
 Locked rotor torque : 290 %
 Breakdown torque : 360 %
 Rated speed : 1450 rpm

Moment of inertia (J) : 0.0066 kgm²
 Duty cycle : S1
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 80 K
 Design : N

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

