

CONFIGURATION OVERVIEW / MP710371/L1.R1

Product code 3GBP312240-ADR


M3BP 315SMD 4, 132 kW, 4 poles

GENERAL

MEPS	EU-MEPS	Altitude	1000 m.a.s.l.
MEPS scope	Inside	Ambient min / max	-20 °C / 40 °C
Motor design	BASIC	Ex atmosphere	No
Legal marking	CE	Customs tariff number	85015381

MAIN CHARACTERISTICS

Motor type	M3BP 315SMD 4
Product code	3GBP312240-ADR
ID code	315C132P4EE5
Shaft height	315 mm
Power	132 kW
Rated voltage U_N	400 V \pm 5 % (IEC 60034-1)
Rated frequency f_N	50 Hz \pm 2 % (IEC 60034-1)
Number of poles	4
Frame material	Cast Iron
Insulation class	F
Temperature class	-
Mounting	IM1001 IMB3



Enclosure protection class	IC411
Cooling	IP55
Weight	1065 kg

OPERATING POINTS

Power [kW]	Voltage [V]	Connec-tion	Frequency [Hz]	Effic. Class	Efficiency [%]	Nominal Cur-rent [A]	Is/In	Duty	Speed [rpm]	T Rise
132	690	Y	50	IE5	97.1	135	7.8	S1	1490	B
132	400	D	50	IE5	97.1	234	7.9	S1	1490	B
132	660	Y	50	IE5	97.1	139	7.5	S1	1489	B
132	380	D	50	IE5	97.1	242	7.4	S1	1489	B
132	415	D	50	IE5	97.1	229	8.3	S1	1491	B
132	460	D	60	IE5	97.2	205	9.2	S1	1791	B

VARIANT CODES

No variant codes selected.

MECHANICAL





Direction of rotation	CW or CCW
Vibration	A
Paint colour	MUNSELL 8B 4.5/3.25
Paint system	C3 - Medium
Bearing, Drive end	Ball Bearing – 6319/C3
Bearing, Non-drive end	Ball Bearing – 6316/C3
Lubrication style	Regreasable
Main terminal box position	D-End top
Main terminal box turnable	4 x 90 degr
Main terminal cable entry	2xM63x1.5
Fan material	Glass-fiber reinforced polypropylene
Fan cover material	Steel
Sound pressure level	68 LpdBA

ACCESSORIES

No accessories selected.

MONITORING

Winding PTC, PTC 1 per phase 150 degr. C
 Vibration sensing, Standard SPM Nipples

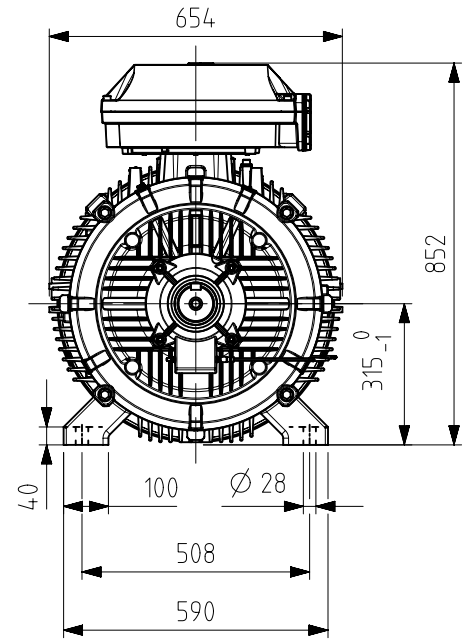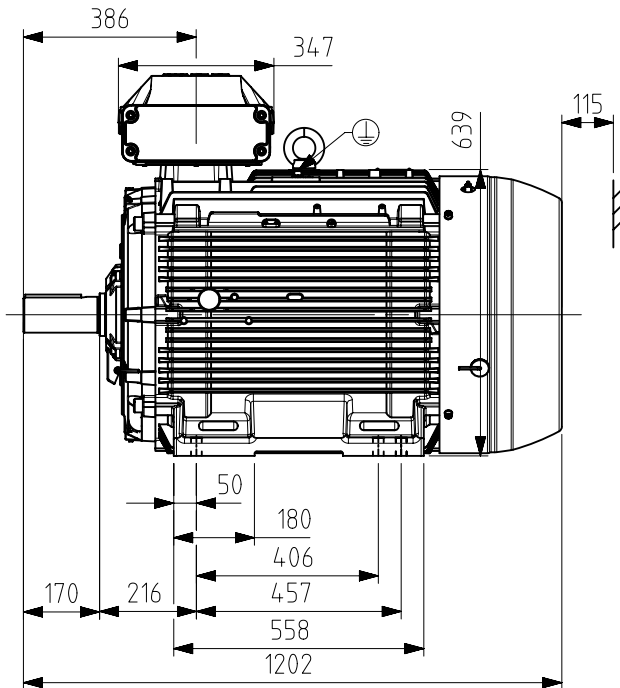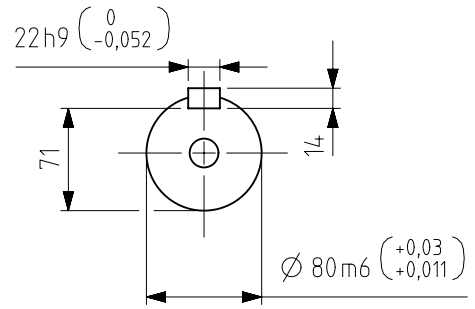

Additional information:

Dimension Print	Motor type: M3BP315 (G/K/L/M) SM_4-12; B3, V5, V6, B6, B7, B8	Document No: 3GZF500031-3621 B
	M3GP/HP315 SM_4-12; B3, V6, B6, B7, B8	

Description:
STANDARD SQUIRREL CAGE MOTOR WITH TERMINAL BOX 370

Unit: Motors and Generators Date: 30-Mar-2021	Issued by: Härmänmaa, Arttu Approved by: Ketoja, Roope	Replaces: Replaced by:
--	---	---------------------------



Customer Reference:

