

CONFIGURATION OVERVIEW / MP879261/L1.R1


Product code 3GAA111330-ADK
M3AA 112MC 2,
5.5 kW, 2 poles

GENERAL

MEPS	EU-MEPS	Altitude	1000 m.a.s.l.
MEPS scope	Inside	Ambient min / max	-20 °C / 40 °C
Motor design	COMPACT	Ex atmosphere	No
Legal marking	CE	Customs tariff number	85015220

MAIN CHARACTERISTICS

Motor type	M3AA 112MC 2
Product code	3GAA111330-ADK
ID code	
Shaft height	112 mm
Power	5.5 kW
Rated voltage U_N	400 V $\pm$ 5 % (IEC 60034-1)
Rated frequency f_N	50 Hz $\pm$ 2 % (IEC 60034-1)
Number of poles	2
Frame material	Aluminum
Insulation class	F
Temperature class	-
Mounting	IM1001 IMB3



Enclosure protection class	IP55
Cooling	IC411
Weight	48 kg
Heater Power	NA

OPERATING POINTS

Power [kW]	Voltage [V]	Connec- tion	Frequency [Hz]	Effic. Class	Efficiency [%]	Nominal Cur- rent [A]	Is/In	Duty	Speed [rpm]	T Rise
5.5	460	D	60	IE3	89.5	8.4	12.3	S1	3533	B
5.5	690	Y	50	IE3	89.2	5.5	10.2	S1	2922	B
5.5	400	D	50	IE3	89.2	9.6	10.2	S1	2922	B
5.5	660	Y	50	IE3	89.2	5.8	9.2	S1	2911	B
5.5	380	D	50	IE3	89.2	10.1	9.2	S1	2911	B
5.5	415	D	50	IE3	89.2	9.3	10.9	S1	2929	B

VARIANT CODES

No variant codes selected.

MECHANICAL

Direction of rotation	-
Vibration	A
Paint colour	MUNSELL 8B 4.5/3.25
Paint system	C3 - Medium
Bearing, Drive end	Ball Bearing – -
Bearing, Non-drive end	Ball Bearing – -
Lubrication style	Greased for life
Main terminal box position	D-End top
Main terminal box turnable	Not turnable
Main terminal cable entry	2x(M25xM20)
Fan material	Glass-fiber reinforced polypropylene
Fan cover material	Plastic
Sound pressure level	70 LpdBA





ACCESSORIES

No accessories selected.

MONITORING

Winding PTC, PTC 1 per phase 150 degr. C
Vibration sensing, No SPM nipples



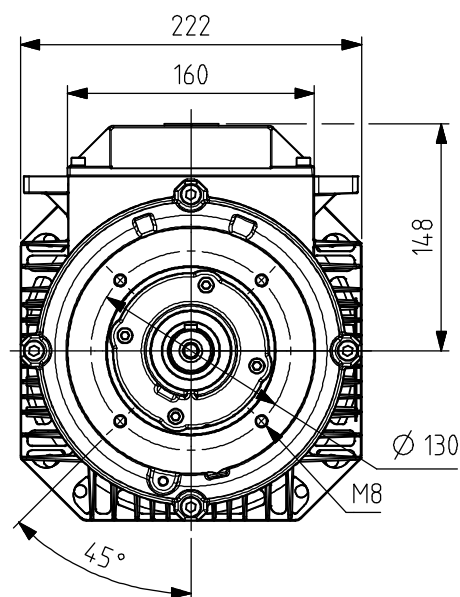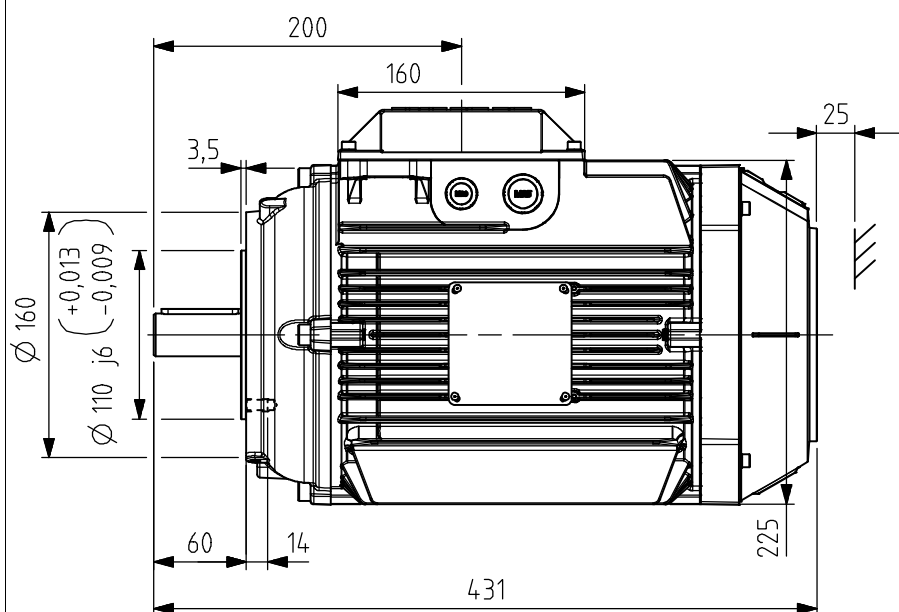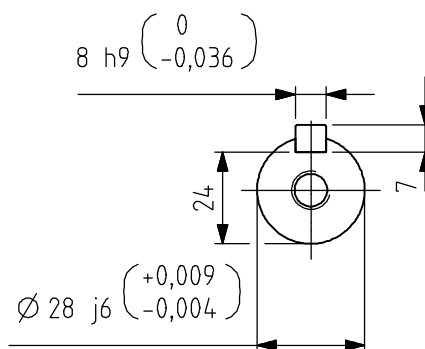

Additional information:

Dimension Print

Motor Type:
M3AA112 (K) MB2, MC2, MB4, MC6, MC8; B14, V18, V19, FT130

Document No:
3GZW500611-19 C

Description:

STANDARD ALUMINUM SQUIRREL CAGE MOTOR

Unit: IEC LV Motors
Date: 26.Jan.2023

Issued by: J. Helin
Approved by: A. Härmänmaa

Replaces:
Replaced by:



Customer Reference:

